

Lubricant Brilube 60

Product information

BRIDON · BEKAERT
THE ROPES GROUP


Typical applications: Excavators, winch ropes, hoist ropes and stay ropes.

General: For heavy duty working ropes in normal outdoor environments and stay ropes used in on-shore applications. A medium thixotropic gel lubricant with stable properties over a wide temperature range and with excellent corrosion protection.

Effective operating range: -55° - +100°C.

Minimum application temperature: -20°C.

Method of lubrication: With high pressure equipment.

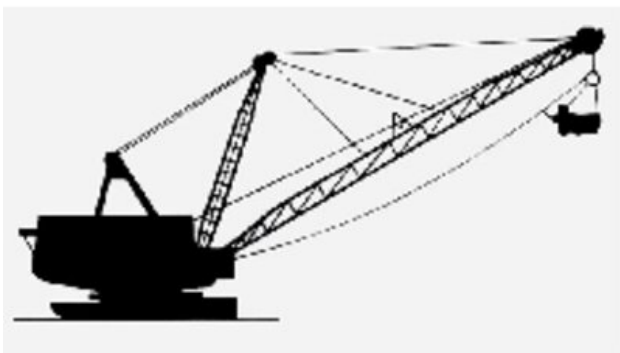

Part Code	Code	Packing
1425	Brilube 62	Can 12,5 kg
1425	Brilube 63	Can 50 kg
1425	Brilube 64	Barrel 180 kg